

Toshiba Air Conditioning - RAV-SM Data Sheet

RAV-SM406BTP-E

Ducted

Features

- R22 and R407C replacement technology
- External static pressure can be raised up to 120 Pa
- Lift pump up to 850 mm lift or gravity drain
- Low noise: low fan speed down to 25 dB(A)
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air with filter





Technical Data

Model reference		RAV-SM406BTP-E
Nominal cooling	kW	3.6
Nominal heating	kW	4.0
Annual power consumption (SM/SP*)	kWh	XXX/535
UK cooling (SM/SP*)	kW	X.X/3.40
UK sensible cooling (SM/SP*)	kW	X.X/2.95
UK heating (SM/SP*)	kW	X.X/2.61
Starting current (SM/SP*)	A	1/1
Running current (SM/SP*)	A	X.X/5.40
Suggested fuse size (SM/SP*)	A	XX/10
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		3 core + earth
Sound power (high/low)	dB(A)	48/40
Sound pressure (high/low)	dB(A)	33/25
Air flow (high/low)	m ³ /h	800/480
Air flow (high/low)	l/s	222/113
Dimensions (H x W x D)	mm	275 x 700 x 750
Unit weight	kg	23
Energy label (cool/heat - SM/SP*)	V-ph-Hz	X/X - A/A+
EER/COP - SM/SP*		X.X/X.X - 3.38/3.84
SEER/SCOP - SM/SP*		X.X/X.X - 5.12/4.02
Pipe sizes (liquid-suction)	inch	1/4-1/2
External static pressure range (SM/SP*)	Pa	XX-XX/30-120

* Refers to outdoor combination SM = Digital Inverter SP = Super Digital Inverter

Dimensional Drawings

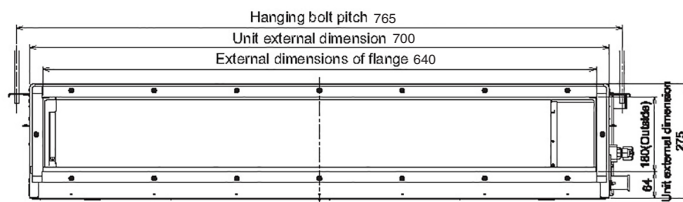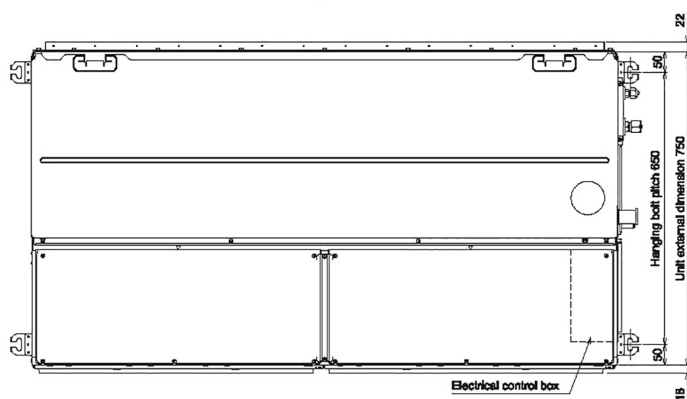

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

