

AIRSTAGE™ Wall Mounted

ASYA012/014GCAH



High Efficiency & Comfort

High Efficient Compact Design

Point

High efficient compact design is realized by mounting a high density and large heat exchanger. Compact body makes it possible to install inconspicuously even in a meeting or office room and comfortable air conditioning is provided.

High density heat exchanger


Making the tube thin: 7 mm → 5 mm
 Increase of heat exchanger volume by high density and adopting sub heat exchanger


Even temperature
 ↓
 Improved heat exchanger effectiveness


Point

More comfort airflow

Comfortable air conditioning is provided by our unique power diffuser.


Heating

Vertical airflow provides powerful floor level heating

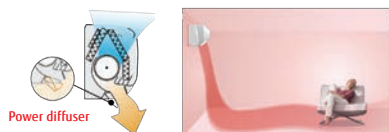

Cooling

Horizontal airflow does not blow cool air directly at the occupants in the room.




Point

Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.



Human sensor

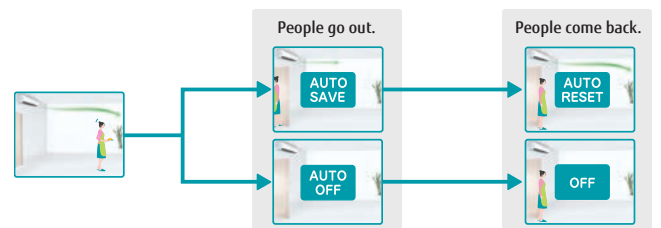


6 Fan Speed Control

Multistep airflow control is possible to suit the environment.

Fan speed
Quiet

Low noise
24 dB(A)



* Compatible Remote Controller is as follows:
UTY-RNRYZ2 / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGVZ1 / UTY-ALGX / UTY-APGX

Specifications

Model name		AS YA012GCAH		AS YA014GCAH	
Power Source		V/Ø/Hz		Single-phase, ~230V, 50/60Hz	
Capacity	Cooling	kW		3.6	4.0
	Heating	kW		4.1	4.5
Input Power		W		25	36
Airflow rate	High	m3/h	690	800	
	Med-H		610	740	
	Med		560	680	
	Med-L		530	610	
	Low		470	550	
	Quiet		330	330	
Sound pressure level	High	dB(A)	40	44	
	Med-H		37	42	
	Med		35	40	
	Med-L		33	37	
	Low		30	34	
	Quiet		24	24	
Dimensions (H x W x D)		mm		268 × 840 × 203	
Weight		kg		9	9
Connection pipe diameter	Liquid (Flare)	mm		6.35	6.35
	Gas (Flare)	mm		9.52	9.52
Drain hose diameter (I.D./O.D.)				13.8 / 15.8 to 16.7	

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.


Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Dimensions

Models:

AS YA012GCAH / AS YA014GCAH

(Unit : mm)

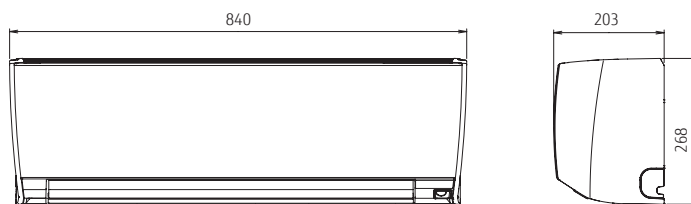

Optional parts

Wired Remote Controller: UTY-RNRYZ2,
Wireless Remote Controller: UTY-LNHY
Simple Remote Controller: UTY-RSRY, UTY-RHRY

- Specifications and design are subject to change without notice for further improvement.
- "AIRSTAGE" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colours may be different from the colors shown in this printed material.
Distributed by: