


Summer Special!

# Cool features, at hot prices!



## LLC Series

- Heating / Cooling operation at -15°C / -10°C
- A++ rating for cooling mode / A+ for heating mode
- Full inverter 2.5kW (0.9-3.0) and 3.4kW (0.9-3.8) models
- Maximum pipe run of 20m / pre-charged 15m
- ON / OFF Programmable timer
- Powerful, rapid (20min) and super-quiet operation (22dBa)
- Energy saving possible due to 1°C tolerance function

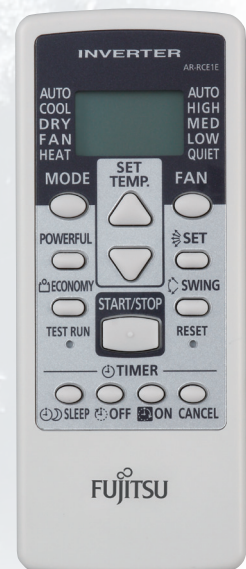

Available through

For more product information visit our website [www.fgeurofred.co.uk](http://www.fgeurofred.co.uk)

**FUJITSU**  
AIR CONDITIONERS

## Specifications

|  | Indoor            | ASYG09LLCC*       | ASYG12LLCC*       |
|--|-------------------|-------------------|-------------------|
|  | Outdoor           | AOYG09LLCC        | AOYG12LLCC        |
| Nominal Capacity (kW)                          | Cooling           | 2.50 (0.90-3.00)  | 3.40 (0.90-3.80)  |
|  | Heating           | 3.00 (0.90-3.80)  | 4.00 (0.90-5.00)  |
| Power Consumption (kW)                         | Cooling           | 0.73              | 1.08              |
|  | Heating           | 0.74              | 1.13              |
| EER / COP (Nominal Conditions)                 |                   | 3.42 / 4.05       | 3.15 / 3.54       |
| Pdesign (kW) @ -10°C                           | Cooling           | 2.50              | 3.40              |
|  | Heating           | 2.30              | 3.20              |
| SEER   | Cooling           | 6.90              | 6.60              |
| SCOP   | Heating (Average) | 4.00              | 3.80              |
| Energy Efficiency Class                        | Cooling           | A++               | A++               |
|  | Heating (Average) | A+                | A                 |
| Annual Energy Consumption (kWh/a)              | Cooling           | 127               | 180               |
|  | Heating           | 805               | 1179              |
| Moisture Removal                               | l/h               | 1.30              | 1.80              |
| Dimensions (HxWxD) mm                          | Inner             | 262x820x206       | 262x820x206       |
|  | Outer             | 535x663x293       | 535x663x293       |
| Net Weight (kg)                                | Inner             | 7                 | 7                 |
|  | Outer             | 24                | 26                |
| Room Air Circulation (high) m3/h               | Inner             | 720               | 720               |
|  | Outer             | 1670              | 1830              |
| Power Supply                                   | V-PH-Hz           | 230 / 1 / 50      | 230 / 1 / 50      |
| Power Supply To                                |                   | Outdoor           | Outdoor           |
| Running Current (A)                            | Cooling           | 3.50              | 5.20              |
|  | Heating           | 3.50              | 5.40              |
| Starting Current                               | A                 | 3.50              | 5.40              |
| Outdoor Unit Factory Fuse / Suggested MCB/Fuse | A                 | 10                | 10                |
| Interconnecting Cable                          |                   | 3 + E             | 3 + E             |
| Remote Control Type                            |                   | Wireless          | Wireless          |
| Sound Pressure (dB(A) Cooling)                 | Indoor Q/L/M/H    | 22 / 33 / 38 / 43 | 22 / 33 / 38 / 43 |
|  | Outdoor H         | 47                | 50                |
| Sound Power (dB(A) Cooling)                    | Indoor H          | 59                | 59                |
|  | Outdoor H         | 61                | 65                |
| Max Pipe Length                                | m                 | 20                | 20                |
| Max Height Difference                          | m                 | 15                | 15                |
| Refrigerant Charge                             | m                 | 15                | 15                |
| Additional Refrigerant Charge                  | g/m               | 20                | 20                |
| Pipe Size (inches)                             | Gas               | 3/8 (9.52mm)      | 3/8 (9.52mm)      |
|  | Liquid            | 1/4 (6.35mm)      | 1/4 (6.35mm)      |
| Operating Range (OC)                           | Cooling           | -10 ~ 43          | -10 ~ 43          |
|  | Heating           | -15 ~ 24          | -15 ~ 24          |
| Refrigerant                                    |                   | R410A             | R410A             |

\*Does not include remote control holder. Please use optional part UTZ-RXLA, if required.

The company reserves the right to make any variation in specification to the equipment described or to withdraw or replace products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form any part of any contract. All equipment and services are supplied subject to FG Eurofred's Terms and Conditions of Sale.

All prices shown exclude VAT.



ISO 9001 Certified Number 01 01 01014  
 ISO 14001 Certified Number 01 01 01014  
 ISO 9001 Certified Number 01 01 01014  
 ISO 14001 Certified Number 01 01 01014  
 BVI Certified Number 114882  
 Fujitsu General (Thailand) Co., Ltd.  
 Fujitsu General (Shanghai) Co., Ltd.

Fujitsu air conditioning products are available from FG Eurofred and local distributors.

**FUJITSU**  
 AIR CONDITIONERS