

Toshiba Air Conditioning - VRF Data Sheet

MML-AP0244BH-E Concealed chassis

Features



- Very compact design can be installed under a standard window sill, only 600 mm in height
- Only 200 mm in depth, allows installation along the wall ensuring space saving
- Top or front air discharge
- Only 32 dB(A) sound pressure



Technical Data

Model reference		MML-AP0244BH-E
Nominal cooling	kW	7.1
Nominal heating	kW	8.0
Capacity code		2.5
Power input (cool/heat)	kW	0.095
UK cooling	kW	6.82
UK sensible cooling	kW	5.12
UK heating	kW	6.48
Starting current	A	1.00
Running current	A	0.46
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	57-52-48
Sound pressure H-L	dB(A)	42-33
Air flow H-L	m ³ /h	950-640
Air flow H-L	l/s	264-178
Static pressure	kPa	0
Dimensions (H x W x D)	mm	600 x 1045 x 220
Unit weight	kg	29

Dimensional Drawings

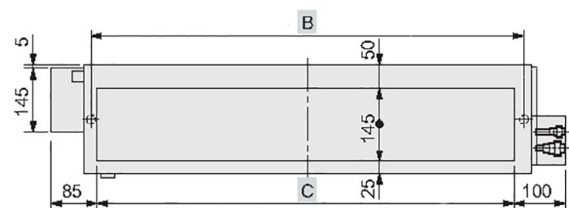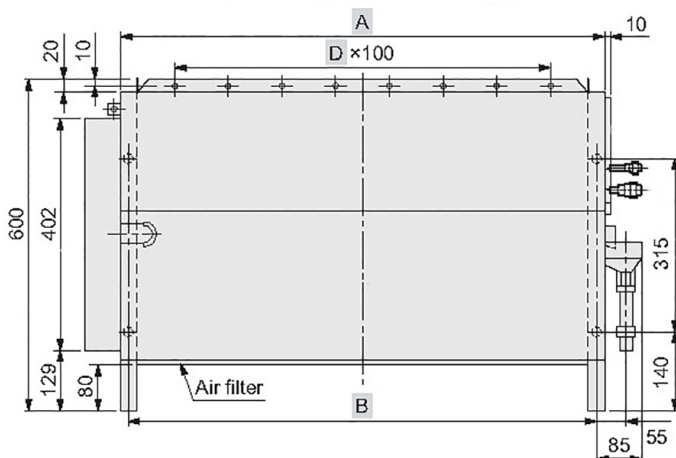

Model MML-	A	B	C	D
AP0074BH-E to AP0124BH-E	610	580	550	4
AP0154BH-E to AP0244BH-E	910	880	850	7

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

