

New Products Release! Optional parts for VRF

AIR CONDITIONING

RB Unit Multi Type for Heat recovery


UTP-RX08AH UTP-RX12AH



Point

Flexible piping connection

A more flexible refrigerant piping work is possible by the use of various piping and RB Unit connections, for adjustments to the floor layout and building structure.

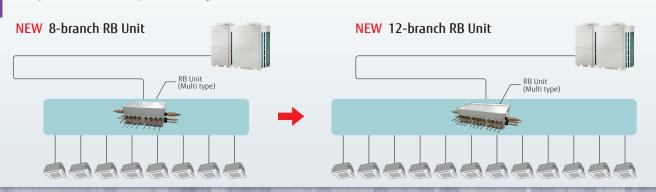

Point

Flexible installation





- · Small design saves space
- A drain pipe is not required

- 2-way connection
 Simple installation series connection design
- -8.8.8.8
 - •Electrics box can be temporarily fixed by sliding down.
- Easy to maintenance in a narrow space

 •Parts can be replaced easily even at narrow
 - space in the ceiling.

 RB unit Ceiling

Specifications

| Type Model name | | Multi type | |
|--|--------|-------------|-------------|
| | | UTP-RX08AH | UTP-RX12AH |
| Power source | V/Ø/Hz | 230/1/50 | |
| nput power | W | 136 | 204 |
| Number of branches | | 8 | 12 |
| Maximum capacity of connectable ndoor units (Q) | kW | Q ≦ 72.0 | Q ≤ 95.0 |
| Maximum capacity of connectable ndoor units per branch (Q) | kW | Q ≦ 8.0 | Q ≦ 8.0 |
| Maximum number of connectable indoor units per branch | | 7 | 7 |
| imensions (H×W×D) | mm | 298x660x618 | 298x990x618 |

•Specifications and design are subject to change without notice for further improvement.

" AIRSTAGE" " are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.

• Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.

ISO 9001 Certified number 15917Q20073RSM

11 Certified number: ISO 14001 Certified nu

