

AIRSTAGE™ Wall Mounted

ASYA18/24GBCH
ASYA030/034GTAH

New design & large capacity



ASYA18/24GBCH



ASYA030/034GTAH

Stylish Flat Design

Point


New design matches to any interior decoration



Powerful & Comfort airflow

Point

Power diffuser
(ASYA18/24GBCH)



Powerful Airow
(ASYA30)



Human sensor (ASYA030/034GTAH only)



Point

A human sensor senses the movement of humans to reduce operation when one is in the room. the wasteful consumption of energy is reduced automatically to keep down electricity bills.
(Available to wired remote controller as UTY-RNRYZ2)



Quiet operation & 6 Fan speed control

Drastic low noise is realised by new airflow structure. In addition, multistep quiet operation is available by 6-step sound level settings.

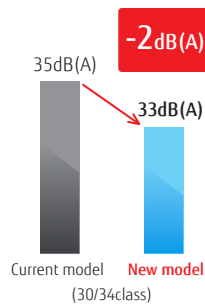

* Compatible Remote Controller is as follows:
UTY-RNRY22 / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGY1 / UTY-ALGX / UTY-APGX

Specifications

Model name	ASYA18GBCH		ASYA24GBCH		ASYA030GTAH		ASYA034GTAH		
Power source	Single-phase, ~230V, 50Hz								
Capacity	UK Total Cooling	kW	4.20	5.30	6.70	7.40			
	UK Sensible Cooling		3.90	4.80	6.00	6.50			
	UK Heating		5.90	7.40	9.30	10.40			
	Nominal Cooling		5.60	7.10	9.00	10.00			
	Nominal Heating		6.30	8.00	10.00	11.20			
Input power		W	32	60	74	103			
	High		840	1,100	1,440	1,620 / 1,520			
Airflow rate	Med-H	m ³ /h	-	-	1,200	1,300			
	Med		770	910	1,050	1,120			
	Med-L		-	-	940	980			
	Low		690	730	890	890			
	Quiet		-	-	700	700			
	High		41	48	53	55 / 54			
Sound pressure level	Med-H	dB(A)	-	-	49	51			
	Med		39	43	45	47			
	Med-L		-	-	42	43			
	Low		35	35	39	39			
	Quiet		-	-	33	33			
Dimensions (H × W × D)	mm	320 x 998 x 238				340 x 1,150 x 280			
Weight	kg	15				18			
Connection pipe diameter	Liquid (Flare)	Inch	1/4		3/8				
	Gas (Flare)		1/2		5/8				

Note : Specifications are based on the following conditions.
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When ASYA18GBCH is connected to the outdoor unit other than J-III, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas).



Dimensions

Models:

ASYA18GBCH / ASYA24GBCH

ASYA030GTAH / ASYA034GTAH

(Unit : mm)

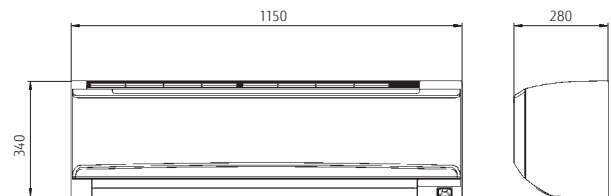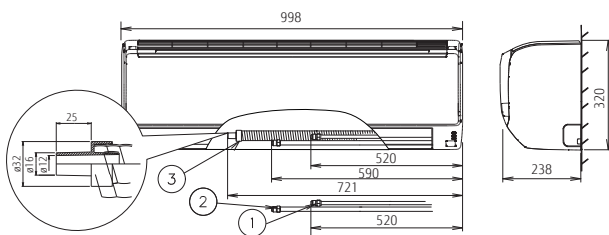

- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain hose connection (Drain hose)

Optional parts

Wired Remote Controller: UTY-RNRY22

Wireless Remote Controller: UTY-LNHY

Simple Remote Controller: UTY-RSRY, UTY-RHRY

- Specifications and design are subject to change without notice for further improvement.
- "AIRSTAGE™" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colours may be different from the colours shown in this printed material.
Distributed by:

FUJITSU GENERAL AIR CONDITIONING (UK) LTD

Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG
www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451

Copyright© 2016 Fujitsu General Limited. All rights reserved. 6EFNP10-1612E