

Central Remote Controller

UTY-DCGYZ1

Max. Controllable
100
indoor units

Max. Controllable
50
groups






For small- and medium-sized buildings and tenants

Point

Easy operation

- The new central remote controller realized an intuitive operation feeling by touch panel operation.
- 7.0inch TFT color screen
- High visibility and easy operation
- All functions can be accessed from the top screen and the following operations are displayed at pop-up window.

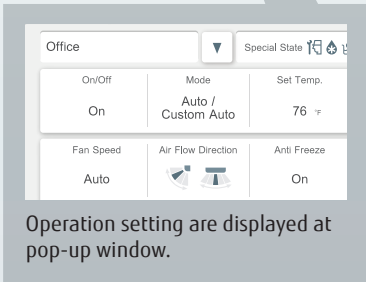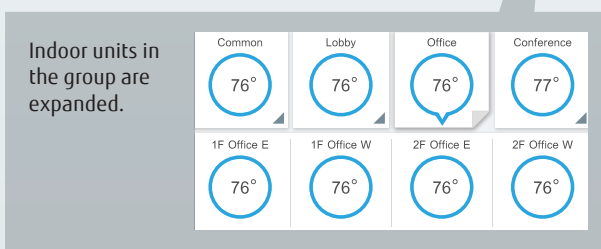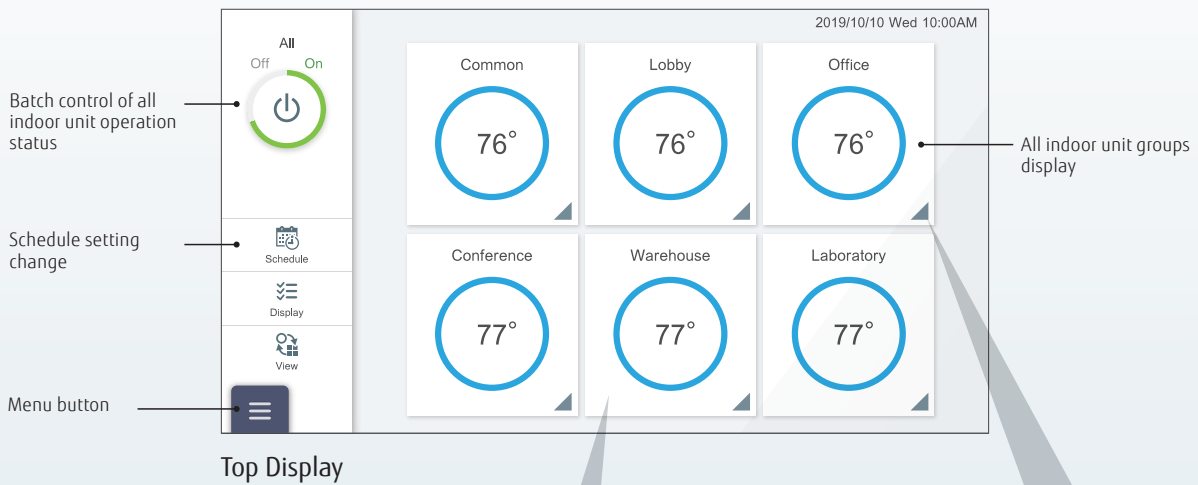

Point

Supports max.23 different-languages

This controller is corresponding to 12 languages and can be expanded to other languages by using the dedicated software.


Standard	English, Spanish, German, French, Italian, Russian, Portuguese, Turkish, Polish, Greek, Dutch, Chinese
Expansion	Bulgarian, Czech, Danish, Estonian, Finnish, Croatian, Hungarian, Romanian, Slovak, Slovenian, Swedish

*: The other language can be overwritten on the registered one.

Trouble support function

Display error details

Display descriptive explanation when an error occurs



Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

Notify room temperature by email


Notify by e-mail when the temperature around the air conditioner is too high or too low

Remote monitoring/Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

Example

- Control / Monitoring Fujitsu air conditioner
- Error notification by E-mail

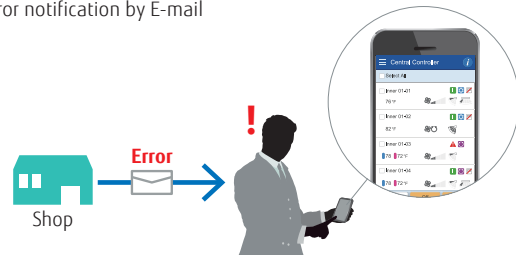

Specifications

Model name		UTY-DCGYZ1
Power Supply		100-240 V 50/60 Hz
Dimensions (H×W×D)	in. (mm)	8-3/8 × 5-1/4 × 1-7/16 (134.6 × 216.1 × 37.9)
Weight	oz (g)	26.5 (750)

Functions

Max. controllable remote controller groups	100
Max. controllable indoor units	100
Max. controllable groups	50
Air conditioning control function	
Custom auto	●
On / Off	●
Operation mode setting	●
Fan speed setting	●
Room temp. setting	●
Room temp. set point limitation	●
Test operation	●
Up/down air direction flap setting	●
Right/left air direction flap setting	●
Individual louver control	●*1
Group setting	●
RC prohibition	●
Anti freeze setting	●
Set temp. auto return	—
Economy mode setting	●
Human sensor control	—


Display		
Error		●
Defrosting		●
Current time		●
Day of week		●
R.C. prohibition		●
Cooling/heating priority		●
Address display		●
Room temp		—
Multi language		●
Summer time		●
Name registration		●
Backlight		●
2D floor layout / 3D building display		—
Timer		
Schedule timer	Period	Week
	On/off, Temp, Mode, Times per day	20
On/off timer		—
Sleep timer		—

Timer	
Program timer	—
Auto off timer	●
Day off	●
Min. unit of timer setting (Minutes)	10
Control	
Status monitoring system	●
Electricity charge apportionment	—
Error history	●
Emergency stop	●*2
Remote management	●
Energy saving management	—
E-mail notification for malfunction	●
Key lock	● Password setting
Low noise mode	—

*1 Only individual airflow batch reset is mounted. *2 This function is available only through external input control.

●: Supported —: Not supported yet

Dimensions

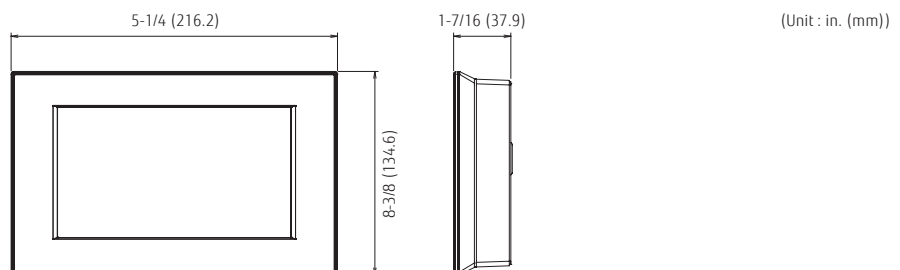

•Specifications and design are subject to change without notice for further improvement.

•“AIRSTAGE™” are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.

•Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.



ISO 9001 Certified number: 1511702007385SM
ISO 14001 Certified number: 15111822002195M
Fujitsu General Central Air-conditioner(Wuxi) Co., Ltd.

•Actual products' colors may be different from the colors shown in this printed material.

Distributed by:

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan

<https://www.fujitsu-general.com/>

Copyright© 2019 Fujitsu General Limited. All rights reserved. 6UNNP4-1901E