

# TOSHIBA

## ESTiA


—  
Energy savings  
and sustainable  
performances



RESIDENTIAL HEATING > AIR TO WATER HEAT PUMP > ESTIA



## ENERGY EFFICIENCY & SUSTAINABILITY

**A+++**  R32 refrigerant with low environmental impact

The growing awareness of the global climate emergency and the resulting governmental incentives to decarbonize heating solutions, will require consumers to seek alternative and environmentally sustainable heating solutions. The innovative ESTIA™ R32 range meets this increasing demand and provides a long term solution to your heating

needs, reducing the dependency on conventional fossil fuel/gas based heating solutions. Delivering high levels of appeal through its impressive capacity specifications for space heating and hot water production, this advanced air-to-water heat pump will also reduce energy bills compared to gas or oil boilers and electric heaters.

## GUARANTEED COMFORT


**65°C**  All year-round hot water

With state-of-the-art liquid injection technology, Toshiba twin rotary compressor enables ESTIA R32 to supply water to heating networks at temperatures that guarantee year-round comfort. This is true even during exceptionally cold periods (65°C leaving water temperature for sizes 8-11-14kW).

For maximum well-being, ESTIA R32 also produces Domestic Hot Water even at exceptionally high outdoor temperatures (+43°C). In addition all models will come with either a 3kW, 6kW or 9kW integrated backup heater, ensuring additional heating and DHW supply, whenever needed.

## SILENT OPERATIONS

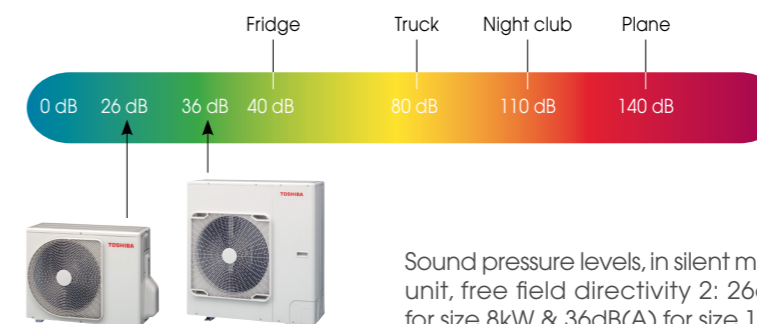


**26dB(A)**  Silent Mode operations for your neighbours




Sound pressure levels, in silent mode, at 5m from the outdoor unit, free field directivity 2: 26dB(A) for size 4kW, 32dB(A) for size 8kW & 36dB(A) for size 14kW.

## TIMELESS DESIGN FOR FLEXIBLE SOLUTIONS

### Space heating for any emitters

-  Under floor heating
-  Medium or low temperature radiators
-  Fan coils  
Comfort cooling & heating


### Domestic hot water production

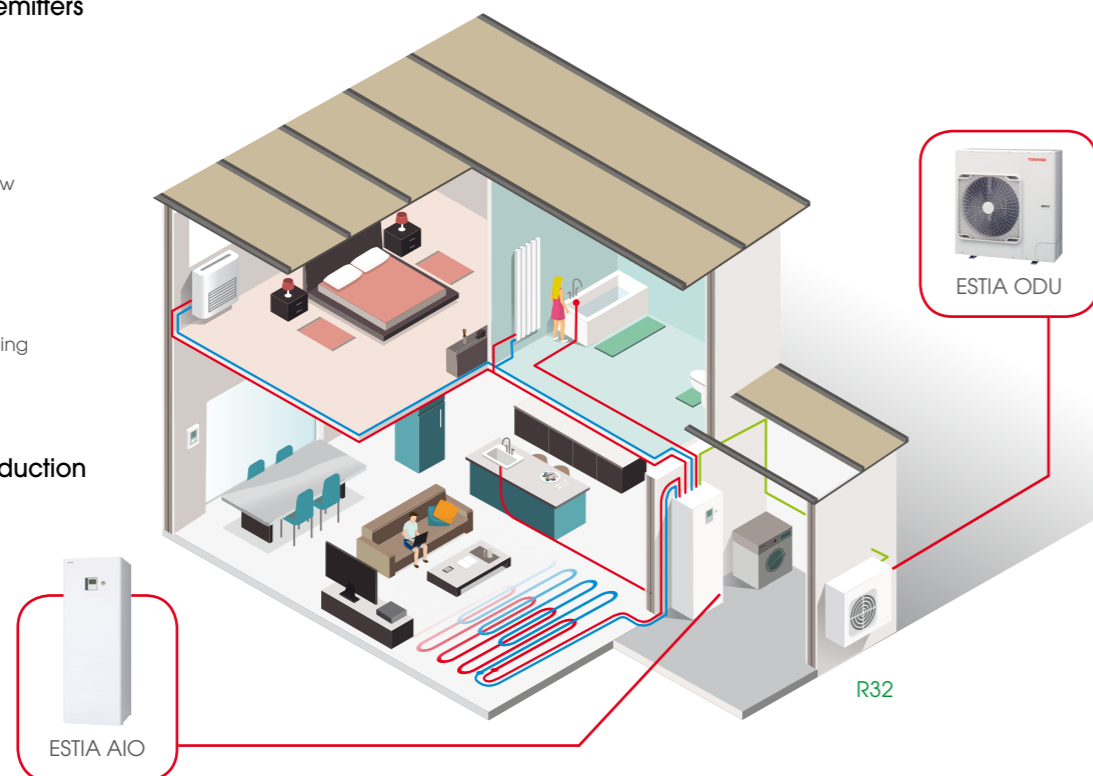

## SMART CONTROL, SMART LIFE




Covering one or two zones, ESTIA R32 remote control allows intuitive operation of functions such as silent mode, energy consumption display and scheduling. The auto-adaptive function offers optimum comfort in relation to the outdoor temperature, minimising energy consumption and energy bills.

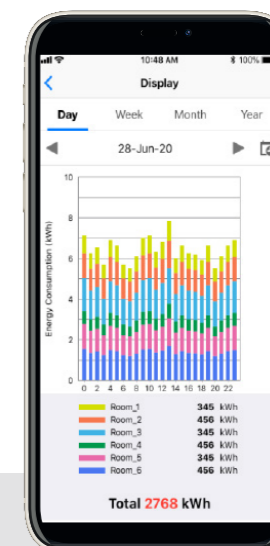

- Energy monitoring
- Smart speaker voice control functions compatible with **Google Home Assistant & Amazon Alexa**



With ESTIA R32 Wireless Interface & Toshiba Home AC Control APP, make your heat pump smart and enhance your comfort at home or away.

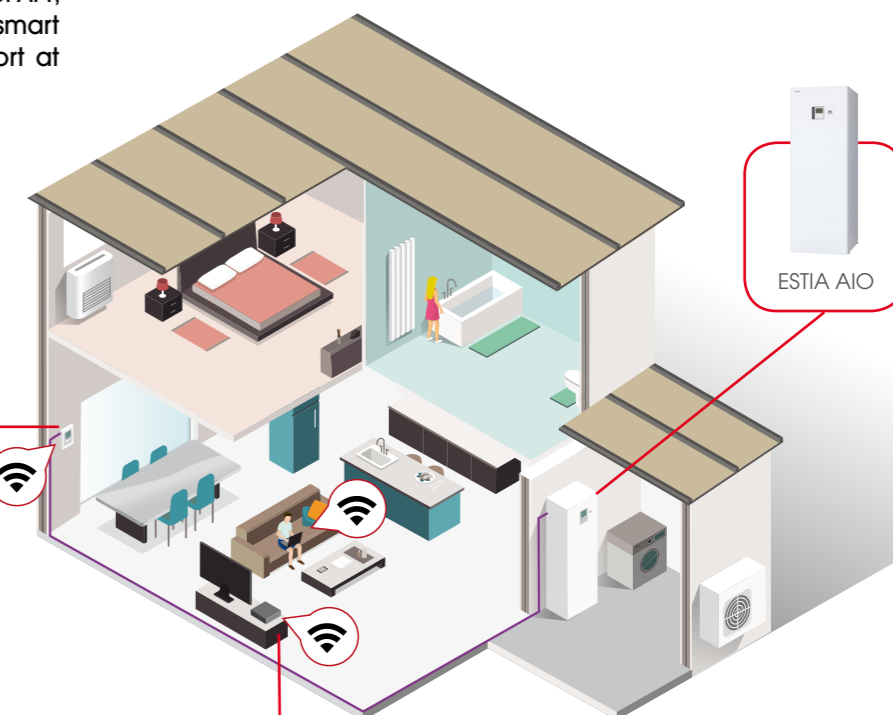

**EASY  
INSTALLATION**

**All-In-One  
Hydro**

Elegant and compact design (H1700xW595xD670mm) for space heating & domestic hot water production to fit any interior


New water port for optional DHW recirculation circuit (with pump field supplied)

Electronic water flow sensor for accurate water flow control

High efficiency variable speed water pump Zone 1

Large choice of back-up heaters:  
3kW 1Ph  
6kW 1Ph  
6kW 3Ph  
9kW 3Ph\*

Hot water cylinder stainless steel 210 liters, 10 bars water pressure

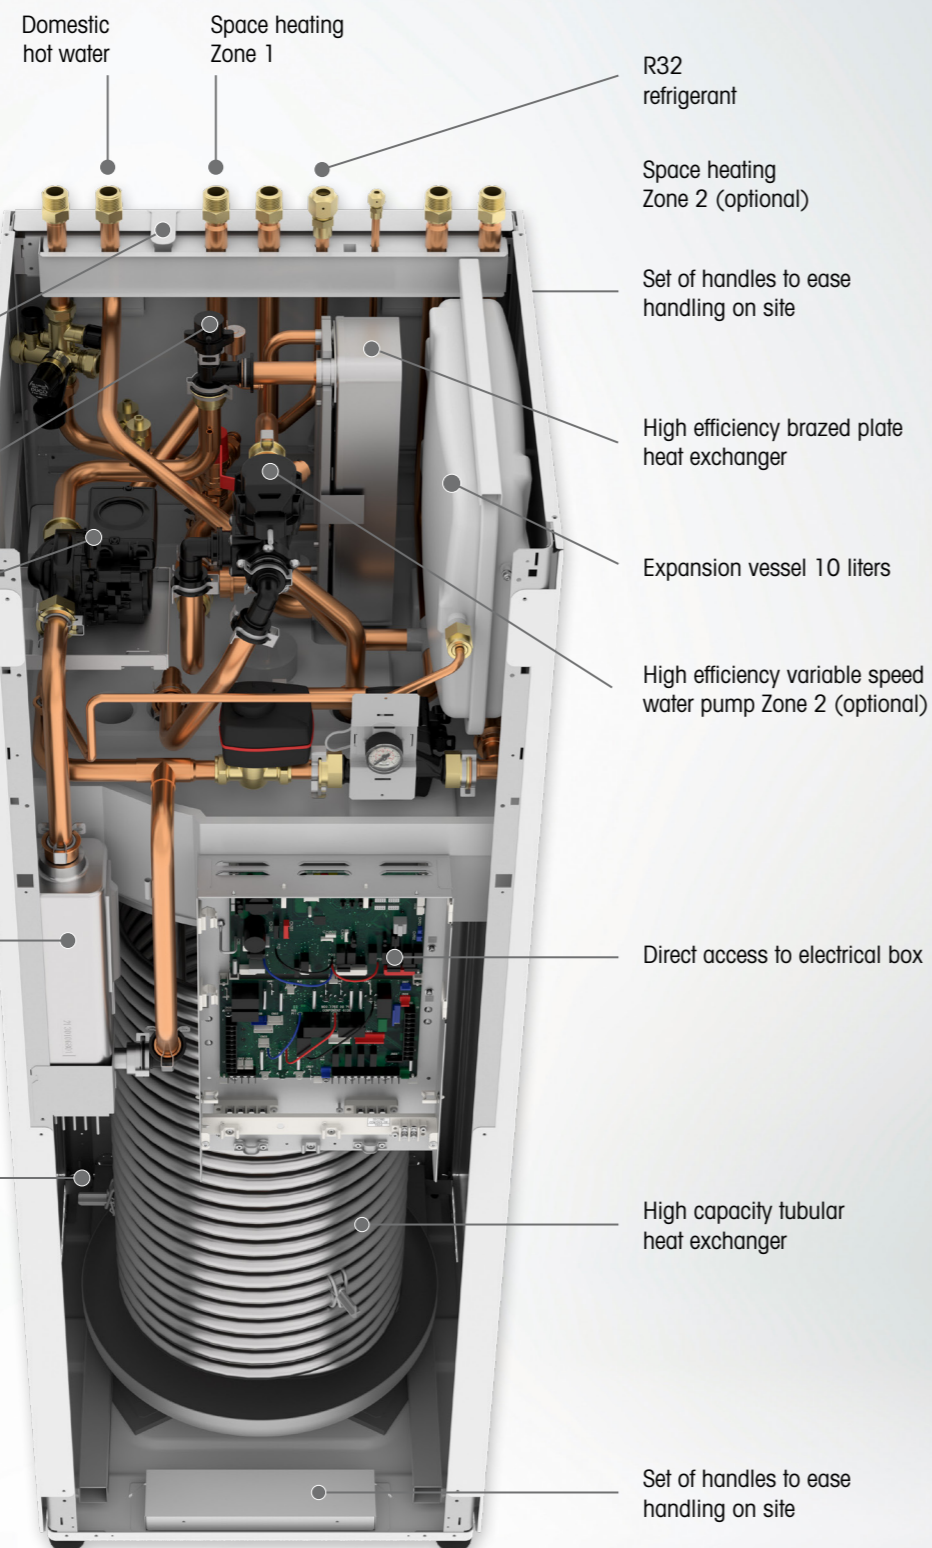

- Domestic hot water
- Space heating Zone 1
- R32 refrigerant
- Space heating Zone 2 (optional)
- Set of handles to ease handling on site
- High efficiency brazed plate heat exchanger
- Expansion vessel 10 liters
- High efficiency variable speed water pump Zone 2 (optional)
- Direct access to electrical box
- High capacity tubular heat exchanger
- Set of handles to ease handling on site

(\*) not available with HWT-601S21


**EASY  
COMMISSIONING**

- Ultra compact Hydro Modules with all of the components accessible from the front panel.
- Easy wiring and connections.
- All-In-One indoor floor standing unit offers all water & refrigerant connections from the top.
- Wall Mounted indoor unit offers all connections from the bottom.
- High efficiency components include: brazed plate heat exchangers, electronic water flow control and variable speed pumps.
- Start-up tool for quick & easy commissioning.



**Wall Mounted  
Hydro Unit**

Elegant and compact design (H720 x W450 x D235 mm) wall-mounted hydro module, to be combined with a choice of external cylinder capacities (150, 200 or 300 liters).

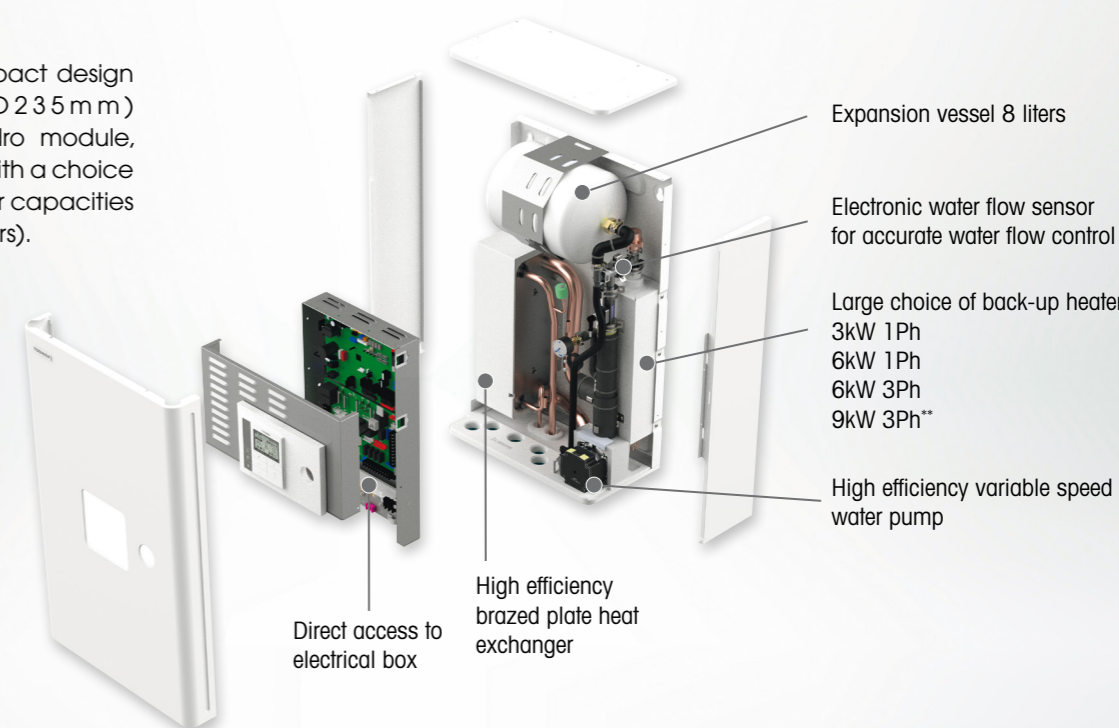


- Expansion vessel 8 liters
- Electronic water flow sensor for accurate water flow control
- Large choice of back-up heaters:  
3kW 1Ph  
6kW 1Ph  
6kW 3Ph  
9kW 3Ph\*\*
- High efficiency variable speed water pump
- High efficiency brazed plate heat exchanger
- Direct access to electrical box

(\*\*) not available with HWT-601XWH

## EXCEPTIONAL HOME COMFORT EXPERIENCE

Comfort in  
Space heating  
& Domestic hot water production

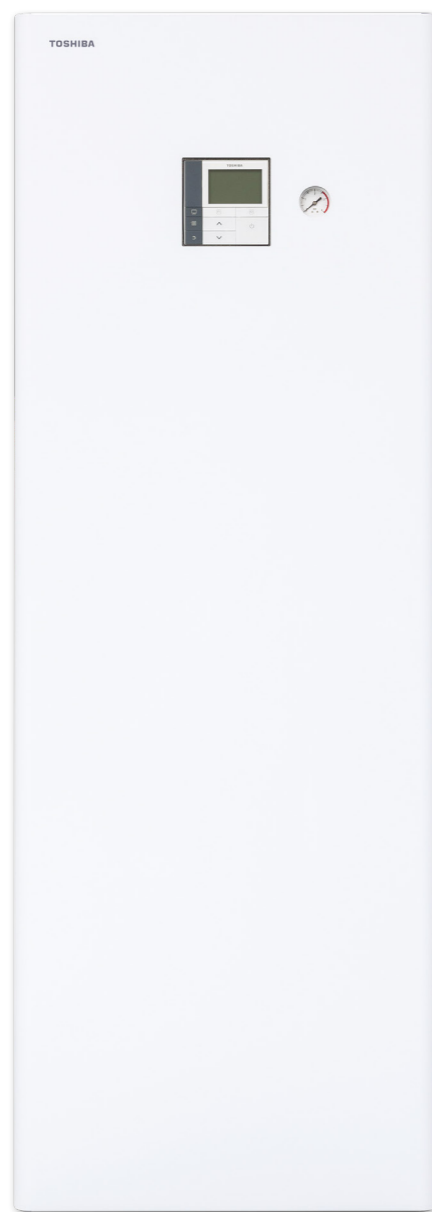

**A+++**  
SCOP up to **4.65**  
COP up to **5.20**



**A+**  
COP DHW up to **3.21**



High leaving water temperature  
**65°C @+7°C** for ODU 8-11-14kW  
**62°C @-25°C** for ODU 8-11kW  
**55°C @-25°C** for ODU 14kW  
outside air temperature



Outdoor unit noise levels  
**26 & 28dB(A)** for ODU 4-6kW  
**32 & 35dB(A)** for ODU 8-11kW  
**36dB(A)** for ODU 14kW  
in silent mode at 5m



Wall mounted hydro unit at 1m  
**29dB(A)**  
All-In-One at 1m  
**24 & 30dB(A)**



	AIO INTEGRATED TANK	WALL MOUNTED + EXTERNAL TANK
Volume	210L	150L-210L-300L
Energy class	A+	A to A+
COP dhw	up to 3.21	up to 2.93

### Production of Domestic Hot Water

ESTIA R32 offers an All-In-One hydro module for heating and domestic hot water production, with an integrated 210 liter tank. This elegant solution for new-build properties has a compact footprint - a mere 595x670mm - to fit any interior.

For renovation projects that would require the replacement of a gas boiler, ESTIA R32 is also available with a wall-mounted hydro module offering a large choice of external cylinder capacities for domestic hot water (150, 210 or 300 liters).



### Comfort in Cooling

All ESTIA R32 units are reversible units as standard from factory (Insulated pipes + condensate drain pan) offering comfort cooling in summertime if requested by end users.

High coefficient of performance in cooling mode with EER up to 4.65 @ Air 35°C / Water 18°C (for underfloor cooling).

**EFFICIENCY  
& RELIABILITY**

Innovation, efficiency, high reliability, energy savings and respect for the environment: these powerful values are at the heart of everything we do at Toshiba Air Conditioning. For over 50 years, Toshiba Air Conditioning has been providing its clients with the guaranteed precision and

expertise of flawless Japanese quality. Products are designed to perform and engineered to perfection. The Toshiba twin-rotary compressor uses advanced technologies to ensure best-in-class performance with low energy consumption.



**A UNIT FOR ANY TYPE  
OF INTERIOR**



**A TECHNOLOGY  
AS INNOVATIVE AS IT IS DISCREET**



This image is used for illustration purpose. Actual installation may vary.



This image is used for illustration purpose. Actual installation may vary.

## SYSTEMS - Performance data

Outdoor unit	Air T°		Water T°	HWT-	401HW-E	601HW-E	801H(R)W-E	1101H(R)W-E	1401H(R)W-E	801H8(R)W-E	1101H8(R)W-E	1401H8(R)W-E			
Wall mounted Hydro unit combination	Air T°	Water T°		HWT-	601XWH_W-E	601XWH_W-E	1101XWH_W-E	1101XWH_W-E	1401XWH_W-E	1101XWH_W-E	1101XWH_W-E	1401XWH_W-E			
AIO Hydro unit combination	Air T°	Water T°		HWT-	602S21S_W-E	602S21S_W-E	1102S21(S-M)_W-E	1102S21(S-M)_W-E	1402S21(S-M)_W-E	1102S21(S-M)_W-E	1102S21(S-M)_W-E	1402S21(S-M)_W-E			
Under floor heating	<b>Energy Efficiency Class - Average Climate - Low LWT</b>			35°C	H	A+++	A+++	A+++	A+++	A+++	A+++	A+++			
	<b>SCOP - Average Climate - Low LWT</b>			35°C	H	4.53	4.58	4.63	4.55	4.65	4.51	4.56	4.57		
	<b>Max heating capacity</b>			+7°C	35°C	KW	H	7.25	7.25	11.9	13.24	18.39	12.27	15.50	18.66
	Nominal heating capacity (rated)			+7°C	35°C	KW	H	4.00	6.00	8.00	11.00	14.00	8.00	11.00	14.00
	COP (rated)			+7°C	35°C	W/W	H	5.20	4.80	5.19	4.60	4.60	5.06	4.74	4.60
	Max heating capacity			-7°C	35°C	KW	H	4.80	6.06	8.11	9.10	13.05	8.23	10.49	13.05
Radiators heating & DHW	<b>Energy Efficiency Class - Average Climate - Medium LWT</b>			55°C	H	A++	A++	A++	A++	A++	A++	A++			
	<b>SCOP - Average Climate - Medium LWT</b>			55°C	H	3.45	3.37	3.63	3.62	3.53	3.59	3.52	3.55		
	<b>Max heating capacity</b>			+7°C	45°C	KW	H	6.97	6.97	11.75	12.41	16.30	12.02	15.24	18.46
	Max heating capacity			-7°C	45°C	KW	H	4.48	5.80	8.00	8.44	11.94	8.12	10.33	12.83
	<b>Max heating capacity</b>			+7°C	55°C	KW	H	6.51	7.53	9.96	10.17	14.31	11.77	14.97	18.15
	Max heating capacity			-7°C	55°C	KW	H	4.31	5.42	7.35	7.72	10.50	8.00	10.17	12.61
Cooling	<b>Max heating capacity</b>			-10°C	35°C	KW	H	4.40	5.57	7.49	8.45	11.94	7.59	9.57	11.94
	<b>Max heating capacity</b>			-7°C	55°C	KW	H	4.31	5.42	7.35	7.72	10.50	8.00	10.17	12.61
	<b>Max heating capacity</b>			-10°C	55°C	KW	H	-	-	7.00	7.38	9.92	7.35	9.27	11.56
<b>Cooling capacity nominal (rated comp Hz)</b>			35°C	7/12°C	KW	C	4.00	5.00	6.00	8.00	10.00	6.00	8.00	10.00	
EER nominal					W/W	C	3.45	3.30	3.20	2.80	2.45	2.87	2.62	2.45	

Max heating capacity: shown at peak value during operation, at max compressor operating range in accordance with EN14511. Nominal heating capacity are given at water delta T° 5°C and rated compressor operating frequency in accordance with EN14511.

## Physical data

Outdoor unit	HWT-	401HW-E	601HW-E	801H(R)W-E	1101H(R)W-E	1401H(R)W-E	801H8(R)W-E	1101H8(R)W-E	1401H8(R)W-E
Dimensions (HxWxD)	mm	630x800x300	630x800x300	1050x1010x370	1050x1010x370	1050x1010x370	1050x1010x370	1050x1010x370	1050x1010x370
Weight	kg	42	42	75	75	88	92	92	92
Sound pressure level (Rated) H/C at 5m <sup>(1)</sup>	dB(A)	31/32	32/32	37/36	37/37	45/45	36/39	44/40	45/45
Sound pressure level (Silent Mode) H/C at 5m <sup>(1)</sup>	dB(A)	26/27	28/27	32/33	35/33	36/37	35/34	35/35	36/37
<b>Compressor type</b>		<b>DC Twin rotary</b>	<b>DC Twin rotary</b>	<b>DC Twin rotary w/injection</b>	<b>DC Twin rotary w/injection</b>	<b>DC Twin rotary w/injection</b>	<b>DC Twin rotary w/injection</b>	<b>DC Twin rotary w/injection</b>	<b>DC Twin rotary w/injection</b>
Refrigerant / Charge (kg)		R32 / 0.9	R32 / 0.9	R32 / 1.25	R32 / 1.25	R32/1.40	R32 / 1.30	R32 / 1.30	R32/1.40
Flare connections (gas-liquid)		4/8" - 2/8"	4/8" - 2/8"	5/8" - 2/8"	5/8" - 2/8"	5/8" - 2/8"	5/8" - 2/8"	5/8" - 2/8"	5/8" - 2/8"
Operating range in space heating	°C	-20~25	-20~25	-25~25	-25~25	-25~25	-25~25	-25~25	-25~25
Operating range domestic hot water	°C	-20~43	-20~43	-25~43	-25~43	-25~43	-25~43	-25~43	-25~43
Operating range in cooling mode	°C	10~43	10~43	10~43	10~43	10~43	10~43	10~43	10~43
Power supply	V-ph-Hz	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	220/240-1-50	380-415-3N-50	380-415-3N-50	380-415-3N-50

(1) Noise pressure levels EN 12102 at 5m, open field directivity 2.

## Physical data

Hydro unit	HWT-	601XWH(M3/M6)W-E	601XWH(T6)W-E	1101XWH(M3/M6)W-E	1101XWH(T6/T9)W-E	1401XWH(M3/M6)W-E	1401XWH(T6/T9)W-E	
Leaving water temperature (without electrical heater)	°C	H	20 ~ 55°C	20 ~ 55°C	20 ~ 65°C	20 ~ 65°C	20 ~ 65°C	
Electric back up heater capacity	KW		3 / 3+3	3+3	3 / 3+3	3+3 / 3+3+3	3 / 3+3	3+3 / 3+3+3
Electric back up heater supply	V-ph-Hz		220-240-1-50	380-415-3N-50	220-240-1-50	380-415-3N-50	220-240-1-50	380-415-3N-50
Maximum current	A		13 / 26	13x2	13 / 26	13x2 / 13x3	13 / 26	13x2 / 13x3
Dimensions (HxWxD)	mm		700x450x235	700x450x235	700x450x235	700x450x235	700x450x235	700x450x235
Weight	Kg		27	27	27	27	27	27
Sound pressure level at 1m	dB(A)		29	29	29	29	29	29

## ALL-IN-ONE Hydro unit - Physical data

Hydro unit	HWT-	602S21 (S-M)(M3/M6)W-E	602S21 (S-M)(T6)W-E	1102S21 (S-M)(M3/M6)W-E	1102S21 (S-M)(T6/T9)W-E	1402S21 (S-M)(M3/M6)W-E	1402S21 (S-M)(T6/T9)W-E		
Tank	Water volume	L	210	210	210	210	210		
	Material		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel		
	Maximum water pressure	bar	10	10	10	10	10		
	Sound pressure level at 1m (1 zone / 2 zones)	dB(A)	24(S) - 30(M)	24(S) - 30(M)	24(S) - 30(M)	24(S) - 30(M)	24(S) - 30(M)		
	DHW Energy Efficiency Class		A+	A+	A+	A+	A+		
	DHW ETA WH - Average climate	%	136	136	130	130	126	126	
	COP at air 7°C (EN16147)		3.21	3.21	3.12	3.12	3.05	3.05	
	Heating time	Hrs	01h36	01h36	01h05	01h05	0h41	0h41	
	Leaving water temperature (without electrical heater)	°C	H	20 ~ 55°C	20 ~ 55°C	20 ~ 65°C	20 ~ 65°C	20 ~ 65°C	
	Electric back up heater capacity	KW		3 / 3+3	3+3	3 / 3+3	3+3 / 3+3+3	3 / 3+3	3+3 / 3+3+3
	Electric back up heater supply	V-ph-Hz		220-230-1-50	380-400-3N-50	220-240-1-50	380-415-3N-50	220-240-1-50	380-415-3N-50
	Maximum current	A		13	13 x 2	13 / 26	13x2 / 13x3	13 / 26	13x2 / 13x3
	Dimensions (HxWxD)	mm		1700x595x670	1700x595x670	1700x595x670	1700x595x670	1700x595x670	
	Weight (1 zone / 2 zones)	Kg		116/122	116/122	116/122	116/123	116/124	

